


Liquid ring pump LRX

Performance curves

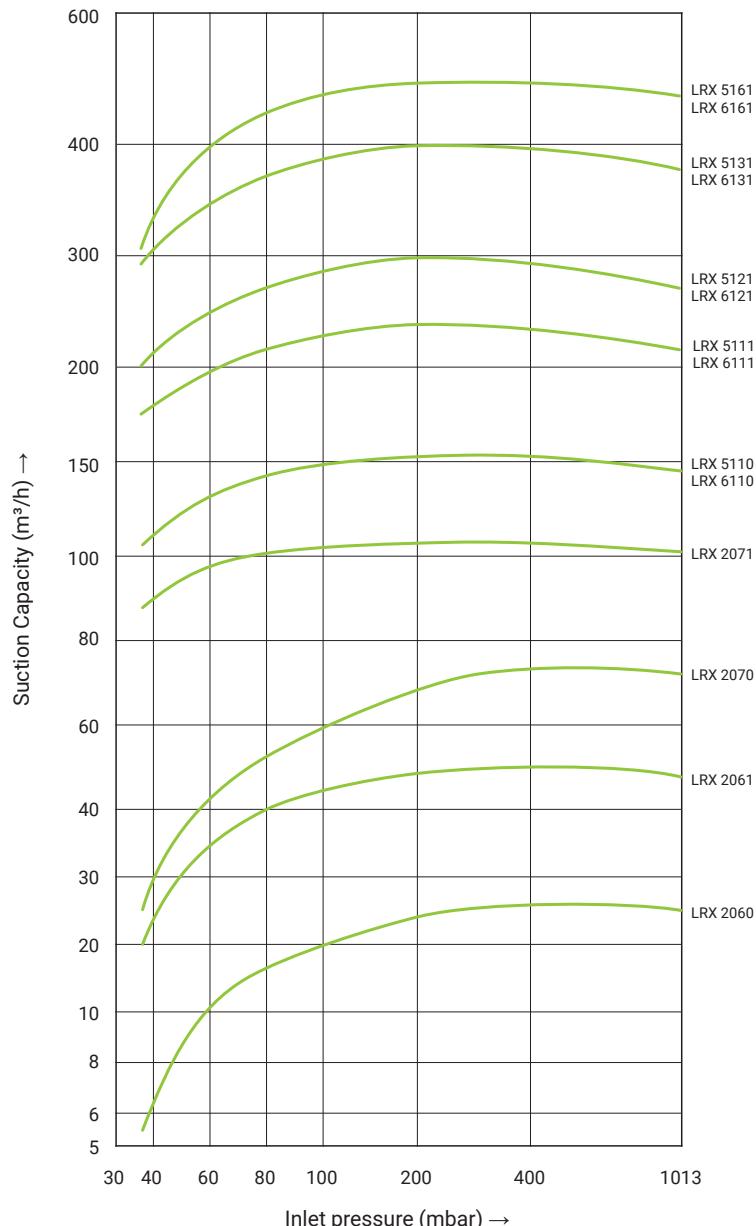

Suction capacity and power consumption depending on inlet pressure

The Characteristics are applicable for compression of 20 °C (68 F) dry air from inlet pressure to atmospheric pressure (1013 mbar) for nominal speed and drive with three phase motors. Ring liquid is water at 15 °C (59 F). The tolerance of suction capacity is -10% and of the power consumption +10%. With different operating conditions performance characteristics change.



Liquid ring pump LRX, LRM conform to
the European Community's Machinery
Directive (CE).